




Ultra II LED Flood/Street Light Range

- Asymmetric beam delivers superior coverage and light uniformity
- Available with collar or surface mount bracket
- Suitable for operation in ambient temperatures from -40 to +50° C
- Nichia chips last over 50,000hours to 90% lumen maintenance (L₉₀ using TM-21)
- Inventronics drivers with typical life rating of 350,000 hours (MTBF at 25°C)
- Protection Against: Surge, Brown Out, Short circuit, Over voltage, Over temperature
- Rugged aluminium housing with anti-corrosive coating
- Modular Design with replaceable sections
- Five year warranty




Model	Power	Fixture Light Output	Weight kg	IP Rating	Colour Temp CRI	Power Factor
U2FL-030	30W	3,500lm	4.2	IP66	5000K (2500-5500K available) CRI 75	>0.97
U2FL-060	60W	6,030lm	4.2			
U2FL-075	75W	9,430lm	5.3			
U2FL-100	100W	11,730lm	5.3			
U2FL-125	125W	13,750lm	5.5			
U2FL-150	150W	18,700lm	7.3			
U2FL-200	200W	23,380lm	7.5			

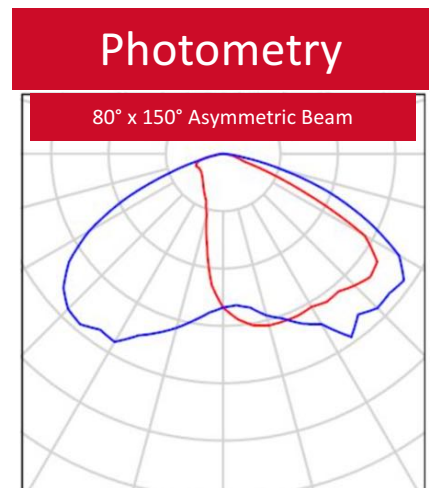




Dimensions		
Models	With Collar (Slipfitter) Mount	With Surface Mount Bracket
U2FL-030 U2FL-060	L592mm×W182.5mm ×H84mm	L496.5mm×W182.5mm ×H82mm
U2FL-075 U2FL-100 U2FL-125	L592mm×W330mm ×H84mm	L496.5mm×W333mm ×H82mm
U2FL-150 U2FL-200	L592mm×W483mm ×H84mm	L496.5mm×W483mm ×H82mm
U2FL-SM	Surface Mount Bracket	
U2FL-CM	Collar Mount	



Collar Dimensions
(order code U2FL-CM)



Surface Mount Bracket Dimensions
(order code U2FL-SM)

