




Ultra II IP Batten – for Indoor and Outdoor Use




- High efficacy, up to 145lm/W
- IP65: Fully sealed PVC outer shell and PMMA diffuser. Highly robust plus corrosion proof, dust proof & water proof
- UV stabilised for long outdoor life with no discolouration
- No lamp assembly required. Quick mount clips included. 1.5m stainless steel suspension cable kit available. Top cable entry as standard. End cable entry available.
- 120 degree beam (to half peak intensity). Illumination fully to the horizontal. No sharp beam edge. No glare due to recessed LEDs and the large surface area milky diffuser
- Flicker Free for increased room occupant comfort
- LED chips maintain over 85% lumen output after 57,000 hrs (L₈₅ using TM21(10K))
- Wide internal chip spacing to maintain lower internal temperatures and prolong life. Suitable for ambient temperatures -27°C to 45°C
- Five year warranty

Low Profile AC Cable Entry
Allows surface mount
with minimal gap



Photometry

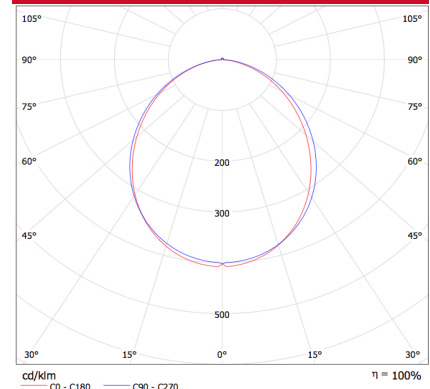

Model	Power	Fixture Light Output (5000K)	Dimensions L x W x H mm Weight	Colour Temp	IP	CRI	Power Factor	Applications
U2IPB-07	7W	1,050lm	300 x 124 x 43 1.0kg	4000K 5000K 6000K	65	>80	>0.93	<ul style="list-style-type: none"> - Industrial task lighting - Offices & Retail – surface, recessed or suspended mount - Low bay for ceilings up to 6m - Undercover car parks - Wall lights - Outdoor use
U2IPB-11	11W	1,560lm	570 x 124 x 43 1.6kg					
U2IPB-14	14W	1,960lm	1180 x 124 x 43 2.6kg					
U2IPB-20	20W	2,700lm	1180 x 124 x 43 2.7kg					
U2IPB-30	30W	4,150lm	1180 x 124 x 43 2.8kg					
U2IPB-35	35W	5,100lm	1503 x 124 x 43 3.5kg					
U2IPB-60	60W	8,200lm	1503 x 124 x 43 3.5kg					